

# Technical Data Sheet

CODE 12456

## VORTICE 230/9" ARI-LL-S

Flush mounted axial fans



### Certifications



IMQ



CE



IMQ Performance



EAC




G-Mark

### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,19	Voltage (V)	220-240
Absorbed Power max (W)	35	Weight (Kg)	3,88
Frequency (Hz)	50/60	Delivery max - Extract (l/s)	188,9
Inlet	Automatico	Delivery max - Extract (m3/h)	680
Insulation Class	II°	Delivery max - Intake (l/s)	97,2
IP	X4	Delivery max - Intake (m3/h)	350
Max absorbed Power at 60Hz (W)	40	Delivery max (m³/h)	680
Max ambient temperature for continuous operation (°C)	50	RPM	1160
Max ambient temperature for continuous operation 60Hz (°C)	50	Rpm - Exhaust	1160
Ø Discharge Hole (mm)	335 ÷ 340	Rpm - Supply	1260
		Sound Pressure level Lp [dB (A)] 3m	45,3

### DIMENSIONS

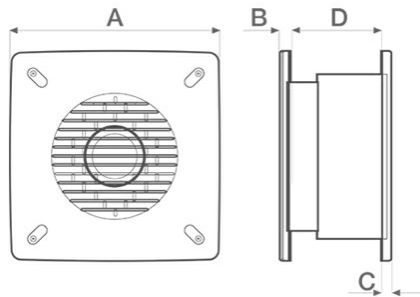

Ø wall hole	335/340
Size A (mm)	400
Size B (mm)	10
Size C (mm)	11
Size D (mm)	180

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

# Technical Data Sheet

CODE 12456

## VORTICE 230/9" ARI-LL-S


Flush mounted axial fans




### DESCRIPTION

- Model designed for installation recessed into wall.
- Reversibility function (intake or extraction).
- Automatic shutter: prevents the entry of cold air and bad smells when the appliance is switched off.
- Material: UV resistant ABS plastic (prevents ageing caused by exposure to sunlight)
- Nominal diameter 230 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings, coupled to screw type thermoplastic impeller with wing profile blades.
- IMQ SAFETY and IMQ PERFORMANCE certifications.


### CURVES

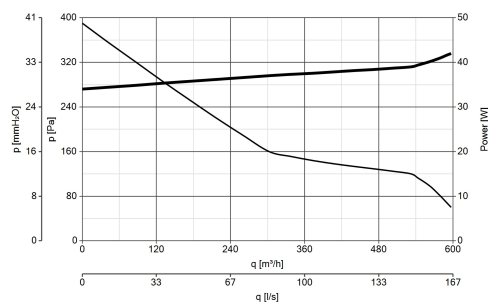

### ACCESSORIES



**KIT TE 230/9"**  
**(TORRETTO)**  
Code 13002



**KIT SO**  
**(SOFFITTO)**  
Code 13012



**KIT ML 230/9"**  
**(MURO-LARGO)**  
Code 13016



**KIT TC 230/9"**  
**(TETTO CON**  
**CONDOTTO)**  
Code 13028

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)  
Pre & Post Vendita: fax +39 02 90699302  
Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)