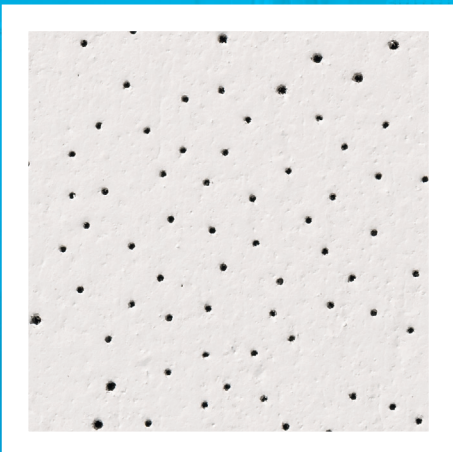






















AMF ECOMIN Filigran

- ECOMIN Filigran is a ceiling panel with a perforated surface and a value-for-money solution for areas requiring good noise absorption
- High light reflectance (86%)
- Ideal for retail environments



Edge details Additional edge details on request		Board 														
Thickness (mm)		13														
Dimensions (mm) Additional sizes on request		600 x 600 1200 x 600														
System		Exposed demountable - System C Exposed - Bandraster, demountable - System I.3 Exposed - Corridor, demountable - System F.3														
Weight		2.5 - 3.1 kg / m²														
Colour		White														
Sound absorption		EN ISO 354 α_w = 0.55 as per EN ISO 11654 - Class C <table><tr><td>Frequency <i>f</i> (Hz)</td><td>125</td><td>250</td><td>500</td><td>1000</td><td>2000</td><td>4000</td></tr><tr><td>α_p Board</td><td>0.45</td><td>0.45</td><td>0.45</td><td>0.60</td><td>0.60</td><td>0.50</td></tr></table> NRC = 0.50 as per ASTM C 423	Frequency <i>f</i> (Hz)	125	250	500	1000	2000	4000	α_p Board	0.45	0.45	0.45	0.60	0.60	0.50
Frequency <i>f</i> (Hz)	125	250	500	1000	2000	4000										
α_p Board	0.45	0.45	0.45	0.60	0.60	0.50										
Fire reaction		Euroclass A2-s1, d0 as per EN 13501-1 RUS KM1 (G1, V1, D1, T1) as per FZ 123														
Light reflectance		86%														
Thermal conductivity		λ = 0.060 W/m K as per EN 12667														
Humidity resistance		70% RH														
Indoor air quality		 A+  E1														
Cleanability	 															
Sustainability		35-49%														

Products may vary from country to country.
Please contact your local sales representative.
For further information and legal notice, please visit our website.