

Rockfon Pacific®

Datasheet



Rockfon Pacific®

- Economical tile with standard surface
- Class B sound absorption with lightweight 12mm thickness
- Basic range of tile dimensions in semi-concealed and visible grid options
- Easy to clean with a vacuum

Product Description

- Stone wool tile
- Visible side: Nuanced white painted fleece
- Rear Side: back fleece

Application Areas

- Office
- Retail


Edge detail	Module size (mm)	Approximate weight (kg/m²)	Recommended installation System
A15	600 x 600 x 12	1.6	Chicago Metallic™ T15 4070
A24	600 x 600 x 12	1.6	Chicago Metallic™ T24 3220
E15	600 x 600 x 12	1.9	Chicago Metallic™ T15 4070
E24	600 x 600 x 12	1.9	Chicago Metallic™ T24 3220



Performance



 $\begin{array}{l} \textbf{Sound absorption} \\ \alpha_w : 0.80 \text{ (Class B)} \end{array}$

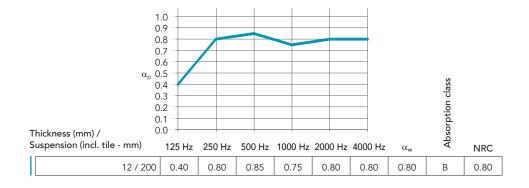



Reaction to fire

Δ1



Humidity and sag resistance

Up to 100% RH.

No visible deflection in high humidity. There will always be some dust/dirt on the panels after some time, and with regular exposure to high humidity this could lead to fungi growth. Please avoid condensation on the panel



Cleaning

- Vacuum



Hygiene

Stone wool provides no sustenance to microorganisms



Environment

Fully recyclable stone wool
The recycled content of Rockfon products is between
29% and 64% according to ISO 14021.
Rockfon acoustic solutions are Cradle to Cradle
Certified® Silver and Bronze (depending on product
type).




Carbon footprint

1.96 - 2.11 kg of CO2 eq. (cradle to gate based on EPD)



Indoor environment





Adresa magazinului: Republica Moldova, Chisinau Acces de pe strada Calea Mosilor 20; clădire în spate Goodyear Tire Center

- @menatwork.md
- https://www.facebook.com/menatwork.moldova
- info@menatwork.md
- (+373)79 448 346; (+373)68 881115
- **(**+373) 22 43-57-19

Sounds Beautiful



